


Brilliantline Pro Dichroic

A quality low voltage halogen reflector lamp consisting of a high pressure xenon gas filled burner, optically positioned in a Dichroic glass reflector. Designed to transmit heat through the back of the lamp and reflect light to the front, resulting in a “cool” beam. Brilliantline Pro lamps feature a high intensity beam with a clearly defined beam spread and have excellent lumen maintenance over their life. They come complete with front glass and the universal burning position. Lifetime 4,000 hours.

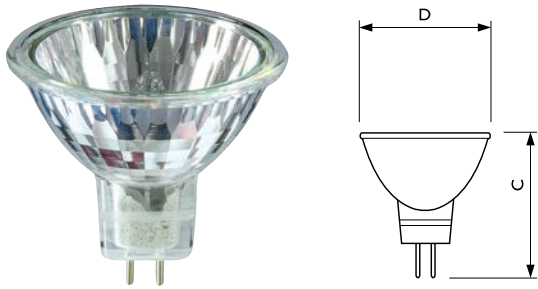

Product ID	Overall Length C max.	Diameter D max.
GU4	40	35.3
GU5.3	46	50.8

Dimensions in mm

BRILLIANTLINE PRO DICHROIC

Commercial Code	Wattage (W)	Cap Base	Voltage	Luminous Intensity (cd)	Average Lifetime (hrs)	Colour Temp (K)	Beam Angle °	Carton Qty
I4612	20	GU5.3	12V	780	4000	3000	36	50
I4615	35	GU5.3	12V	3100	4000	3000	24	50
I4616	35	GU5.3	12V	1500	4000	3000	36	50
I4617	35	GU5.3	12V	700	4000	3000	60	50
I4625	20	GU4	12V	800	4000	3000	30	50
I4627	35	GU4	12V	1500	4000	3000	30	50