




LuxSpace Gen III Wall-wash

Our highly energy-efficient LuxSpace family has now received a major upgrade, in the form of an improved system efficacy. The extremely low power consumption of this LED solution results in significant energy savings compared with traditional CFL downlights. There is also a range of different sizes and outputs, and an array of different accessories, ensuring maximum flexibility in customising the right light effect for your application. Best of all, this family of luminaires delivers specification grade performance, including a DALI dimming system, IP54 ingress protection (front part) and better glare control than ever before. These innovative downlights are ideal for applications in offices, shops, hotels and hospitals where an energy efficient general lighting solution is needed.



Features and Benefits

- Features the latest LED technology to deliver high system efficacy, resulting in up to 80% energy savings compared with conventional CFL downlights.
- Realises specification grade standards in visual comfort, performance and consistent colour rendering:
 - Better colour rendering: CRI80;
 - Better colour consistency.
- Provides more flexibility with a full range and different accessories.
- Compact curved design gives the luminaire a professional look.

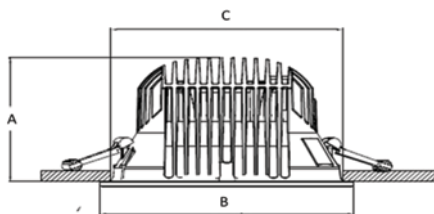

Product ID	A (mm)	B (mm)	C (mm)
Mini - DN488 M-A	88.5	ø163	ø150
Compact Power - DN498 M-A	119.5	ø218.3	ø200

Dimensions in mm (Nominal)



LuxSpace Gen III Wall-wash continued

LUXSPACE GEN III WALL-WASH

Family name	LuxSpace Gen III Wall-wash	Driver	External DALI driver
Model	Mini - DN488 M-A Compact Power - DN498 M-A	Dimmable	DALI Compatible
Lumen/ Watt	3000K Mini - 12W/ 960lm Compact Power -23W/ 1900lm 4000K Mini - 12W/ 1000lm Compact Power -23W/ 2000lm	Installation	Recessed mounting with flexible spring clips
Correlated Colour Temperature (CCT)	3000K, 4000K	IP rating	IP20
Colour Rendering Index (CRI)	80	Colour of housing	White
Flex and Plug	Yes	Application	Retail, Hospitality, Offices
Lifetime L70*	50,000hrs	Accessories	Adaptor ring (White/Grey)
Unified Glare Ratio (UGR)	22	Reflector	Matt
		Suspension Height - min/max	n/a
		Maximum Run Length	n/a

* = When the fitting reaches 70% of full potential (new)

COMMERCIAL CODE	I2NC	DESCRIPTION
LUXSPACE 3 MINI RECESSED WALL-WASH DOWNLIGHT		
DN48812W3KDWBMW	911401800899	DN488 1xDLED-3000 PSD-E M-A WH CAU
DN48812W4KDWBMW	911401800699	DN488 1xDLED-4000 PSD-E M-A WH CAU
LUXSPACE 3 COMPACT POWER RECESSED WALL-WASH DOWNLIGHT		
DN49823W3KDWBMW	911401803099	DN498 1xDLED-3000 PSD-E M-A WH CAU
DN49823W4KDWBMW	911401803199	DN498 1xDLED-4000 PSD-E M-A WH CAU