


# MASTER TL5 High Efficiency

Low-pressure mercury discharge lamps with a tubular 16mm envelope. Specifically designed for operation with electronic gear, and suited for dimming. Optimal lighting efficiency at 35°C ambient temperature (compared with TL-D at 25°C). Allows use of more compact luminaires for lighting system minimalisation.

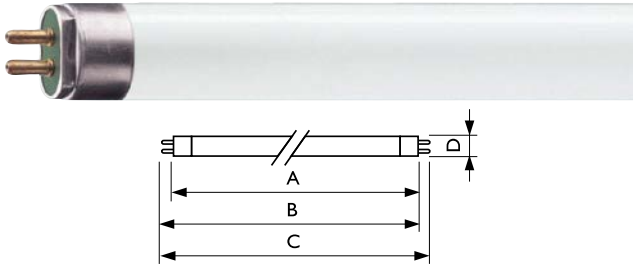

Product ID	A max.	B max.	C max.	D max.
14W	549.0	556.1	563.2	17
21W	849.0	856.1	863.2	17
28W	1149.0	1156.1	1163.2	17
35W	1449.0	1456.1	1463.2	17

Dimensions in mm

## MASTER TL5 HIGH EFFICIENCY

Shortcode	Wattage (W)	Cap Base	Luminous Flux Lamp (lm)	Average Lifetime (hrs)	Colour Rendering Index (Ra)	Colour Temp (K)	Min Order Quantity	Carton Qty
TL514W830HE	14	G5	1350	24000	85	3000	40	40
TL514W840HE	14	G5	1350	24000	85	4000	40	40
TL514W865HE	14	G5	1250	24000	85	6500	40	40
TL521W830HE	21	G5	2100	24000	85	3000	40	40
TL521W840HE	21	G5	2100	24000	85	4000	40	40
TL521W865HE	21	G5	1950	24000	85	3000	40	40
TL528W830HE	28	G5	2900	24000	85	3000	40	40
TL528W840HE	28	G5	2900	24000	85	4000	40	40
TL528W865HE	28	G5	2700	24000	85	6500	40	40
TL535W830HE	35	G5	3650	24000	85	3000	40	40
TL535W840HE	35	G5	3650	24000	85	4000	40	40
TL535W865HE	35	G5	3450	24000	85	6500	40	40