


MASTER TL5 High Output

Low-pressure mercury discharge lamps with a tubular 16mm envelope. Specifically designed for operation with electronic gear, and suited for dimming. Optimal lighting efficiency at 35°C ambient temperature (compared with TL-D at 25°C). Allows use of more compact luminaires for lighting system minimalisation.

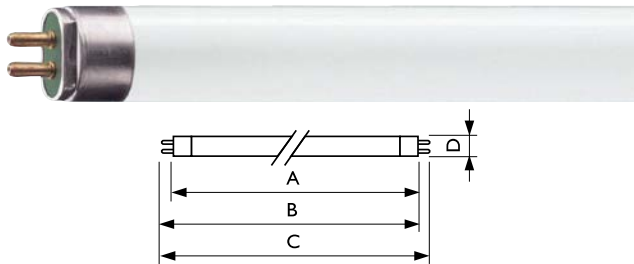

Product ID	A max.	B max.	C max.	D max.
24W	549.0	556.1	563.2	17
39W	849.0	856.1	863.2	17
49W	1449.0	1456.1	1463.2	17
54W	1149.0	1156.1	1163.2	17
80W	1449.0	1456.1	1463.2	17

Dimensions in mm

MASTER TL5 HIGH OUTPUT

Shortcode	Wattage (W)	Cap Base	Luminous Flux Lamp (lm)	Average Lifetime (hrs)	Colour Rendering Index (Ra)	Colour Temp (K)	Min Order Quantity	Carton Qty
TL524W830HO	24	G5	1950	24000	85	3000	40	40
TL524W840HO	24	G5	1950	24000	85	4000	40	40
TL524W865HO	24	G5	1820	24000	85	6500	40	40
TL539W830HO	39	G5	3500	24000	85	3000	40	40
TL539W840HO	39	G5	3500	24000	85	4000	40	40
TL539W865HO	39	G5	3300	24000	85	6500	40	40
TL549W840HO	49	G5	4900	24000	85	4000	40	40
TL549W865HO	49	G5	4650	24000	85	6500	40	40
TL554W830HO	54	G5	5000	24000	85	3000	40	40
TL554W840HO	54	G5	5000	24000	85	4000	40	40
TL554W865HO	54	G5	4750	24000	85	6500	40	40
TL580W830HO	80	G5	7000	24000	85	3000	40	40
TL580W840HO	80	G5	7000	24000	85	4000	40	40