


OptiVision

An asymmetric luminaire for downlighting that combines a compact design with very high efficiency. It provides excellent spill-light control and limitation of glare and upward leakage of light. It accommodates metal-halide lamps for good colour rendering or high-pressure sodium lamps for economical operation. Available with narrow, medium and wide beams.



Features and Benefits

- Excellent spill-light control; limitation of glare and upward leakage of light is secured by asymmetric optics that achieve peak intensity at 60° and a sharp cut-off of light at 80°
- Housing dust proof and waterproof to IP65; no internal cleaning required
- Integrated protractor scale for aiming
- The compact, low-weight luminaire, together with the low drag factor, enables savings on mast costs
- Specially designed heat fins to provide optimal working conditions for lamp and reflector system

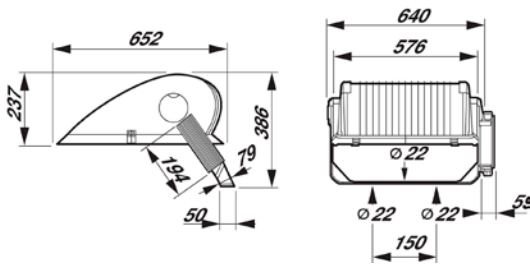

Product ID	L (mm)	W (mm)	H (mm)
MVP507	640	652	386

Dimensions in mm (Nominal)

OPTIVISION			
Family Name	OptiVision	Control Gear	Conventional (gear tray mounted or IP65 box) **
Model	MVP507	Installation	Floodlight mounting bracket
Lamp Type	SON-T, MHN-LA **	IP rating	IP65
Wattage	600W (SON-T), 1kW, 2kW (MHN-LA) **	Weight	17.3kg (excluding gear)
Lamp Colour	4200K/5600K (MHN-LA) **	Colour of housing	Silver
Colour Rendering Index (CRI)	80/90 (MHN-LA) **	Application	Sports Facilities / Industrial Areas / Car Parks
Flex and Plug	No	Accessories	NA
Optics	NB, MB, WB		

** Please note that lamp and control gear are to be purchased separately.

COMMERCIAL CODE	I2NC	DESCRIPTION
MVP507MH1KWVB	910401647780	MVP507 MHN-LA1000W VB
MVP507SONTIKWVB	910401647680	MVP507 SON-T1000W VB
MVP507SONT600WB	910401647580	MVP507 SON-T1000W VB
MVP507MH2KWNB	823807803511	MVP507 MHN-LA2000W/400V/NB BK
MVP507MH2KWMB	823807803611	MVP507 MHN-LA2000W/400V/MB BK
MVP507MH2KWVB	823807803711	MVP507 MHN-LA2000W/400V/WB BK